PowerLite™ Sider HN65

■ MAX PowerLite 400 psi system ■

MAX developed the world's first high-pressure pneumatic nailing system and introduced it to the Japanese market in 1994. For the past decade the MAX PowerLite 400 psi system has revolutionized the construction industry in Japan. Powered by 400 psi technology, the MAX PowerLite tools are approximately 40% lighter and 20% smaller than most competitors tools without sacrificing power. Now, the MAX PowerLite system is available in the U.S. market. Experience the Next Generation in nailing technology with MAX.

FEATURES

Clean finish eliminates driver marks



Only **4.2 lbs**

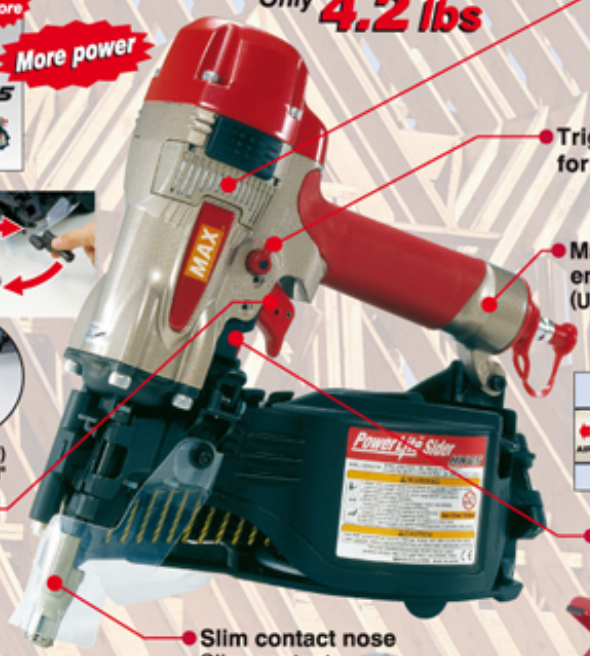

- **Reduced Exhaust Air System**
  Side exhaust with built-in silencer

- **Trigger Lock for safety**
- **Maintenance free end cap filter** (US Patent 5637125)





- **Easy to replace contact nose for shooting wide range nails**
  By using two different sizes of Contact nose, HN65 can shoot from .083" to .131" shank diameter nail.

for **Siding**
Contact Nose S (Black)
Nail shank .083" to .099"

for **Decking**
Contact Nose L (Silver)
Nail shank .099" to .131"

- **Anti-double fire mechanism** (US Patent 5597106)
- **Reduced recoil trigger system** (Patent Pending)

- **Dial adjustable depth control**

- **Slim contact nose**
  Slim contact nose helps with nail placement.

Comes with plastic carry case

TOOL SPECIFICATIONS

MODEL	HN65
WEIGHT	4.2 lbs
DIMENSIONS	11-7/8" (H) × 5" (W) × 10-5/8" (L)
LOAD CAPACITY	400 nails
OPERATING PRESSURE	170 to 320 psi

APPLICABLE FASTENERS

15 degree flat wire welded nails

Head diameter
Contact nose S .197" to .236"
Contact nose L .236" to .276"

Smooth, Screw and Ring Shank

Nail length 1-1/2" to 2-1/2"

Shank diameter
Contact nose S .083" to .099"
Contact nose L .099" to .131"

15 degree flat plastic sheet collated nails



Contact nose S .197" to .236"
Contact nose L .236" to .276"

Smooth, Screw and Ring Shank

Nail length 1-1/4" to 2-1/2"

Shank diameter
Contact nose S .083" to .099"
Contact nose L .099" to .131"

APPLICATIONS

● Siding ● Exterior ● Decking ● Sheathing ● Subfloor

PowerLite Compressor AKHL1050E

For the PowerLite Sider HN65 operation, the PowerLite Compressor and PowerLite Hose are required.

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAX®

MAX USA CORP.

257 East 2nd Street Mineola,New York 11501
Phone:800-223-4293 Fax:516-741-3272
www.maxusacorp.com

Dealer: