

MAX

TYNTIER

30
YEARS
ANNIVERSARY
Since 1993
RE-BAR-TIER



The most advanced cordless Rebar tying tool



RB218
9 to 21 mm
combination

RB398S
20 to 39 mm
combination

RB518
32 to 51 mm
combination

RB441T
20 to 44 mm
combination

RB611T
32 to 61 mm
combination

RB401T-E
20 to 40 mm
combination



TYNTIER


TYNTIER

TYNTIER

R&D and Tool & Wire Manufacturing

MAX Advantage begins with our R&D engineering and production teams and ends with our customers. Based on end-user feedback, we continually re-engineer our products to meet real-world demands. MAX developed the world's first battery operated rebar tying tool in 1993 for the Japanese market, and in 1995 for European market.

MAX R&D department has a highly strict standard for the durability, making our tools work under severe application environments. In 2017 MAX launched the 7th generation model, named RB441T TWINTIER, and with this expanding the line up with the TWINTIER series. MAX RE-BAR-TIER is revolutionizing rebar tying applications all around the world.

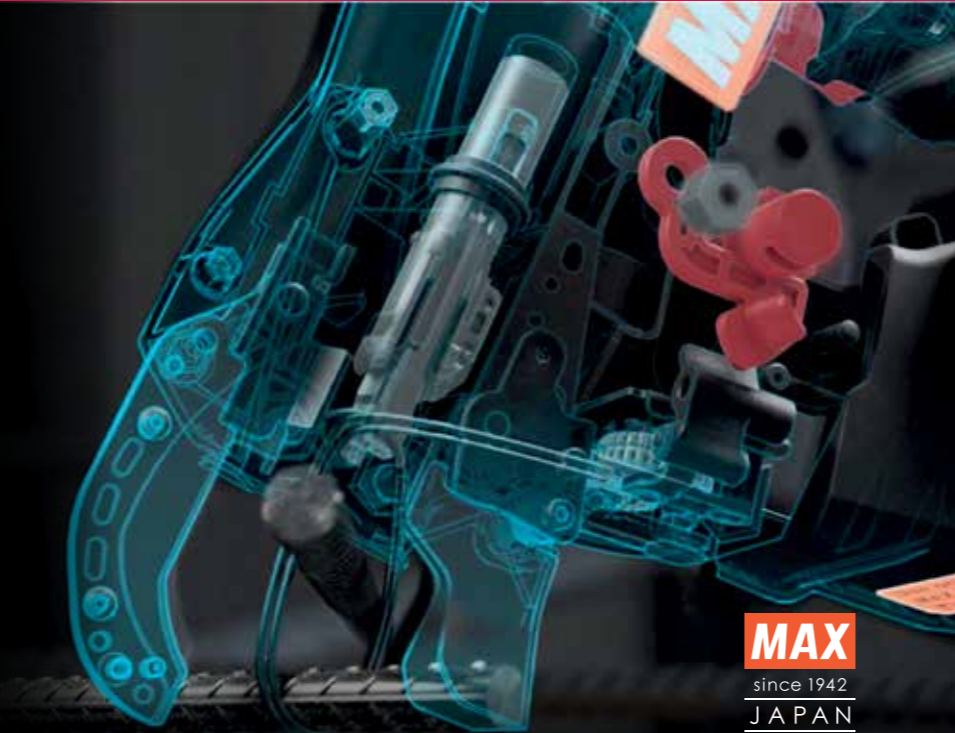

Making work life easier and more enjoyable worldwide

Working to create new standards, we have developed a deep familiarity with the people who use our products. This encourages us to think boldly, as we aim to bring the world a unique style of convenience. Our products are designed around a simple idea: Making work life easier and more enjoyable worldwide, reducing stress and maximizing performance. That's how we enhance the work environment. That is why we keep challenging ourselves to make lives better.



MAX HSE POLICY




MAX HSE means that you can trust that our tools are engineered with your health, safety and environmentally friendly in mind.

Save Time, Save Money

- 5 times faster than handtying
- Easy one hand operation
- Reduces health problems
- Reduces training expenses
- Increase productivity

Development history of RE-BAR-TIER

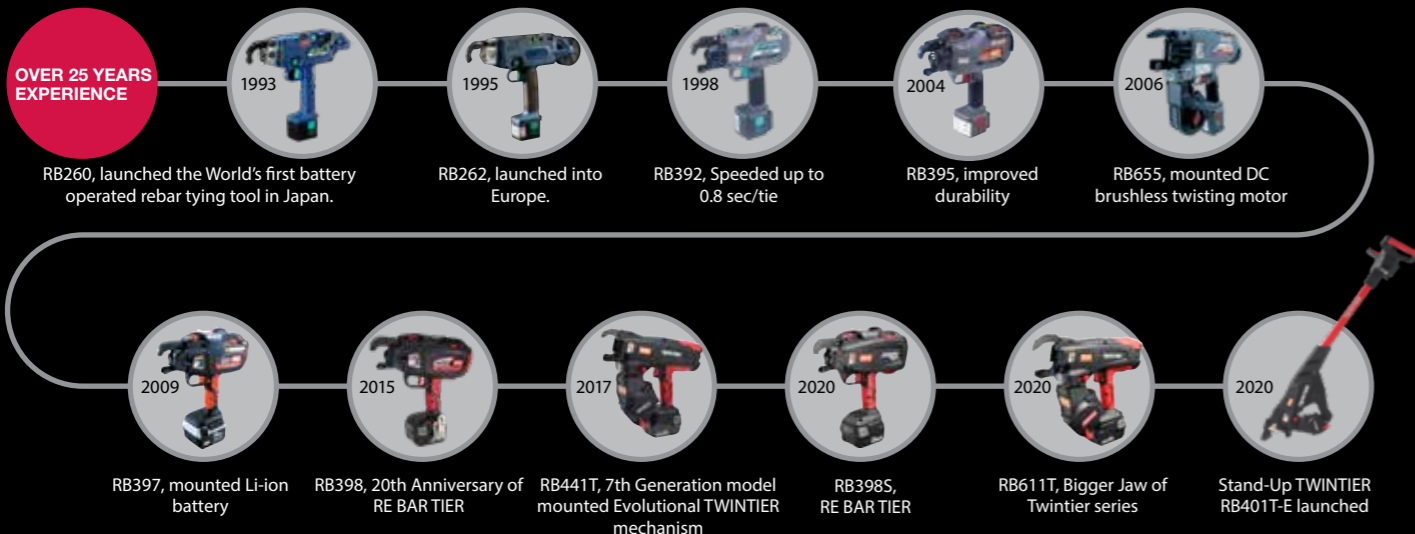

INCREASE YOUR SAFETY

Reduces your health problems such as back pain and musculoskeletal disorder.



INCREASE YOUR PRODUCTIVITY

5 times faster than hand tying. The speed and one hand operation leads to a higher productivity.



FOR BETTER QUALITY JOB

Reduces the risk of concrete cracks on low decking, due to shorter tie knots.



COST SAVINGS THROUGH LESS WIRE USAGE

The unique wire pullback mechanism, uses only the wire length needed, and pulls the wire efficiently to strengthen the tying force.

RB441T

(From 20-44mm) Min.D10+D10 / Max.D22+D22



+30% FASTER
+50% STRONGER

Weight Only 2.5kg


RB611T

(From 32-61mm) Min.D16+D16 / Max.D32+D29



TW1061T SERIES

Ø 1.0mm wire RB441T/RB611T/RB401T-E

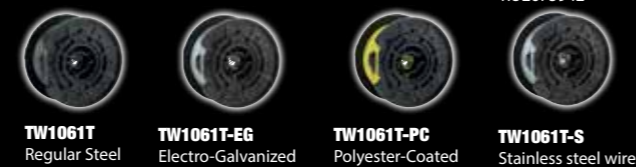


30 COILS / BOX

MAX TW1061T Series Tie Wire is patented.

All patent-infringing products hinders fair trading and will not be tolerated. Use of non-TW1061T Series Tie Wire can result in serious problem that obstructs proper mechanical tool operation. Furthermore, the intended tying performance cannot be ensured. Make sure to only use TW1061T Series items in all MAX TWINTIER. Any tools using non-TW1061T-Series Tie Wire can be declined repair service.

New Twin Wire Mechanism

Conventional Mechanism Single Wire VS New Generation Twin Wire




LESS WIRE BUT STRONGER TENSILE

RB441T (Twin Wire 1 wrap) has stronger tensile value than others (single wire 3 wraps).


30% Faster Tying Speed

Saves time & Increases your productivity

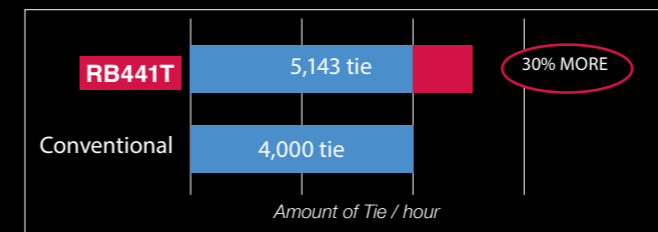

Less Wire Consumption

Shorter Wire = Save you money

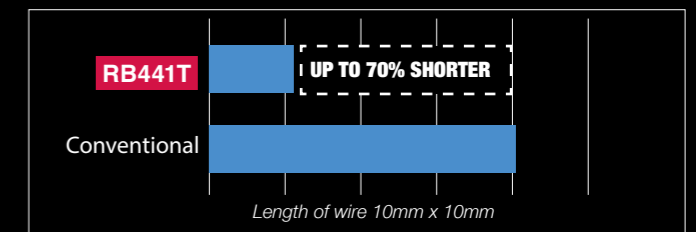


More Tie Capacity

200% more ties per coil




Stronger Tightness

50% Stronger than conventional For more Stable Tying

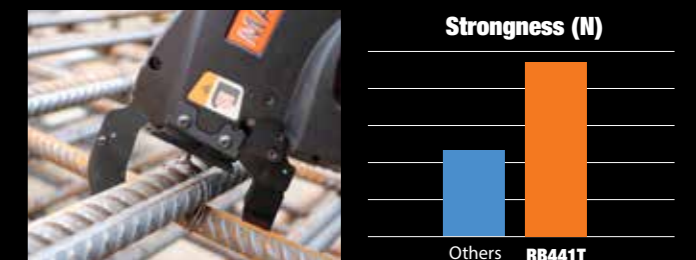

Height of tied wire is only 12mm

Lower ear and no tail

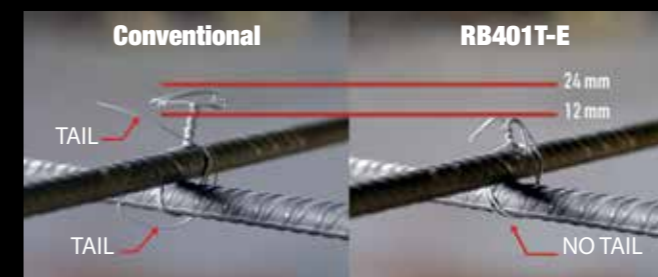

No. of Tie/coil

	Conventional	RB441T	RB611T	RB401T-E
D10+D10	120	265	-	260
D13+D13	120	240	-	235
D16+D16	120	215	205	210
D20+D20	-	180	180	175
D22+D22	-	170	170	-
D25+D25	-	-	155	-
D38+D16	-	-	150	-
D38+D16+D16	-	-	140	-

RB401T-E

(From 20-40mm) Min.D10+D10 / Max.D20+D20



UNIQUE IMPROVED POINTS

RB218

(From 9-21mm)
Min. Mesh x Mesh
Max. D10+D10



RB518

(From 32-51mm)
Min. D16+D16
Max. D22+D25



RB398S

(From 20-39mm)
Min. D10+D10
Max. D16+D19

Higher Battery Capacity
4,000 tie/charge
(34% improved)

Faster Tying Speed.
Only 0.85 Sec/tie
(6% improved)

Lighter Weight
2.3kg (without Wire)
(4% improved)

MODEL	RB218	RB398S	RB518	RB441T	RB611T	RB401T-E
	9 to 21 mm combination	20 to 39 mm combination	32 to 51 mm combination	TWINTIER 20 to 44 mm combination	TWINTIER 32 to 61 mm combination	TWINTIER 20 to 40 mm combination
WEIGHT / kg <i>Battery included</i>	2.4	2.3	2.4	2.5	2.5	4.6
DIMENSIONS / mm (H x W x L)	305 x 105 x 290	305 x 105 x 290	305 x 105 x 305	295 x 120 x 330	300 x 120 x 350	322 x 408 x 1,100
TYING SPEED	Less than 1 second	0.9 second	Approx. 1 second	0.7 sec	0.7 sec	0.7 sec
WRAPS PER TIE	3 wraps	3 wraps	3 or 4 wraps	1 wrap	1 wrap	1 wrap
BATTERY	5.0 Ah Li-ion 14.4 V JPL91450A					
CHARGER	JC925A 50min (80% capacity) / 65min (100% capacity)					
TIES PER COIL	150~210 ties	120 ties	3 wraps: 90 ties 4 wraps: 75 ties	170~265 ties	140~205 ties	175~260 ties
TIES PER CHARGE	4,600 ties	4,000 ties	3 wraps: 3,200 ties 4 wraps: 2,900 ties	5,000 ties	5,000 ties	4,600 ties
APPLICABLE RE-BAR Ø mm	Mesh x Mesh - 10x10	10x10 - 16x19 Up to 13x13x13x13	16x16 - 22 x 25	10x10 - 22x22 Up to 13x13x16x16	16x16 - 32x29 Up to 19x19x19x19	10x10 - 20x20 Up to 13x13x13x13

Standard Equipment



2x JPL91450A battery pack



Plastic carrying case



JC925A charger

Optional Accessories



Extension bar



Lift Up Nose

TW898 SERIES

Ø 0.8mm wire RB398S/RB218/RB518



TW898
Regular Steel



TW898-EG
Electro-Galvanized



50 COILS / BOX



TW898-PC
Polyester-Coated



TW898-S
Stainless Wire

Use only for RB397/RB398/
RB398S
Use with Stainless
Wire Kit
Custom-made Products



PJRC160 CORDLESS REBAR CUTTER

- Cutting speed: 3.3 sec (16mm rebar)
- 314 cut/charge for D16 rebar

MAX PJRC160 3.3 (sec)

A Company 4.9 (sec)

B Company 5.5 (sec)

(Ø16 mm RE-BAR)



Cut up to
16mm rebar


Durable DC
Brushless motor

Reversible cutter,
double the number
of cuts possible

25.2V Lithium ion battery

Weight 7.6kg



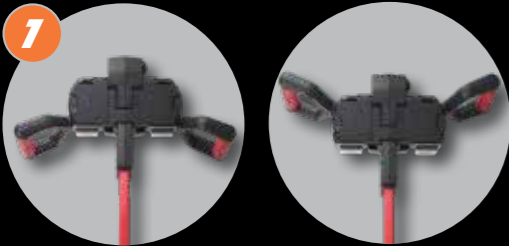

2 Position Handle



2 Nose attachments available for different distance from ground




Contact Switch



RB401T-E

4 Height of tied wire is only 12mm
Lower ear and no tail

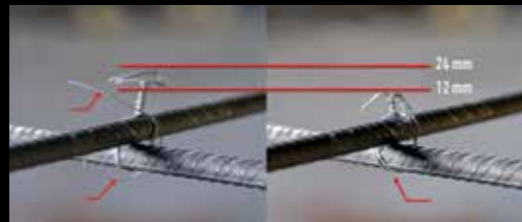

5 STANDARD INCLUDED



Plastic carrying case

2x JPL91440A battery pack

JC925A charger



Large rebar/bridge



Large rebar/subway



Cage building



Multiple rebar tying



Precast factory



Electrical and plumbing piping




Windmill Construction



Slab tying/Road

REDUCES BACK STRAIN

Changes in lumbar compression force during tying motion

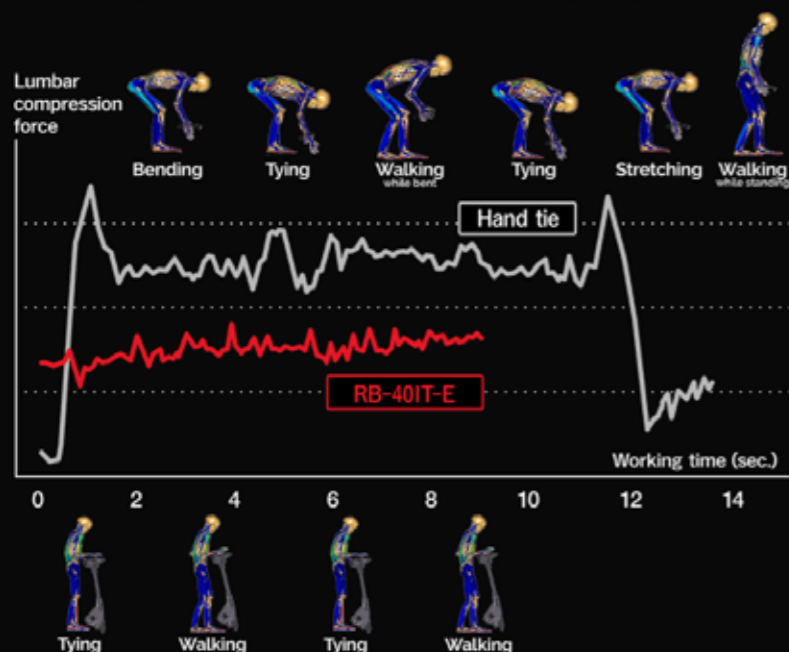


Up to **88%**
Less Effort



Hand tie

RB401T-E

Up to **48%**
Less Compression




Hand tie

RB401T-E

Calorie consumption has been reduced by 50% because the tool enables you to tie rebar without bending over.

Extended Frame makes it possible to tie rebar cross sections without bending over. Eliminates the hassle of bending over to tie rebar and alleviate painful lumbar compression.

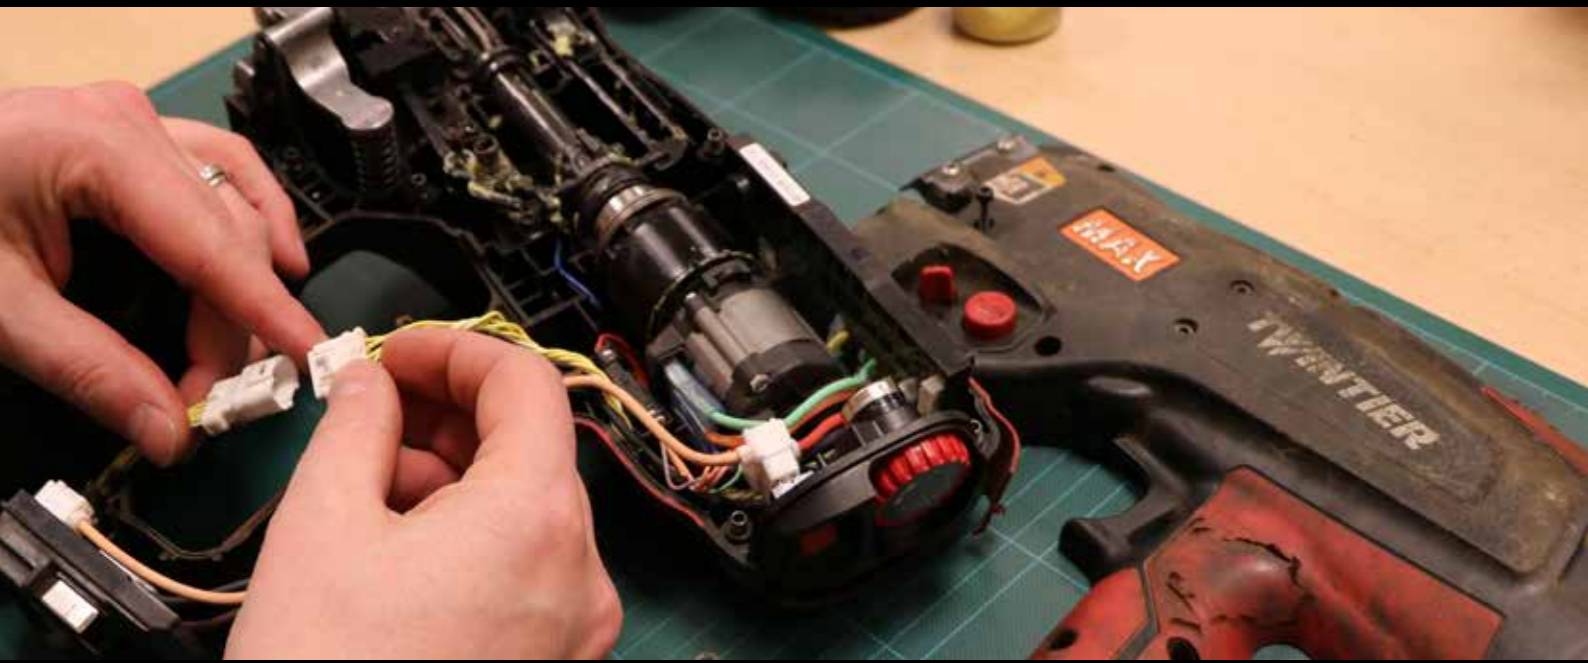

“Authorized repair centre for whole of Europe”

We have authorized repair centers for the whole of Europe. We and our dealers are not only content with selling a tool, but we also provide quality service to maintain the end-user’s work. We have experience from our own repair company in Japan and have accumulated knowledge since the 1950s. This experience enables us to provide the quality service the end-user wants. Quality service is one of the most important ways of ensuring that customers remain satisfied. We promise to continuously update our skills and knowledge in order to ensure this satisfaction.

Members of Max Group

TOPICS

MAX TW1061T Series Tie Wire is patented.

All patent-infringing products hinders fair trading and will not be tolerated. Use of non-TW1061T Series Tie Wire can result in serious problem that obstructs proper mechanical tool operation. Furthermore, the intended tying performance cannot be ensured. Make sure to only use TW1061T Series items in all MAX TWINTIER. Any tools using non-TW1061T-Series Tie Wire can be declined repair service.



Business Locations in Europe



MAX EUROPE B.V.



MAX EUROPE B.V. GERMAN OFFICE

MAX EUROPE B.V.
 Antennestraat 45
 1322 AH Almere
 TEL: +31 (0)36 546 9669
 Fax: +31 (0)36 536 3985
 URL: <http://www.max-europe.com>

MAX EUROPE B.V. GERMAN OFFICE
 Bonner Straße 203d
 40589 Düsseldorf
 TEL: +49 (0)211 5408 2877

Business Locations in the World

**NEW YORK
MAX USA CORP.**
 205 Express street
 Plainview, NY 11803, U.S.A.
 Telephone:
 (1)800-223-4293
 Fax: (516)741-3272
 Url: <http://www.maxusacorp.com>

**SINGAPORE
MAX ASIA PTE. LTD.**
 101, Cecil street, no.
 16-01 Tong Eng building,
 Singapore 069533
 Telephone:
 (65)6226-2180
 Fax: (65)6226-2182

**TOKYO (HEAD OFFICE)
MAX CO., LTD.**
 6-6, Nihonbashi Hakozaki-cho,
 Chuo-ku, Tokyo, Japan
 Postcode: #103-8502
 Telephone:
 (81)3-3669-8131
 Fax: (81)3-3669-7401
 Url: <http://www.max-ltd.co.jp/int/> (global site)

**HONG KONG
MAX CO., LTD.**
 7-B Chuan kei fty bldg.,
 15-23, Kin hong st.,
 Kwai Chung, New territories,
 Hong Kong
 Telephone:
 (852)2426-2106
 Fax: (852)2480-4242

**SHANGHAI
MAX CO., LTD.**
 Room 1505, block e, Jin Hongqiao
 Guangchang, no. 2, Lane 686,
 Wuzhong road, Minhang district,
 Shanghai, proc
 Telephone:
 (86)21-3133-8105
 Fax: (86)21-3133-8107

TYNTIER



RE-BAR-TIER



www.facebook.com/maxeuropebv/



www.instagram.com/max_europe/



www.linkedin.com/max-europe



www.youtube.com/



MAX EUROPE B.V.

Antennestraat 45
1322AH Almere
The Netherlands
Tel.: +31-(0)36-546-9669
Fax: +31-(0)36-536-3985
www.max-europe.com
e-mail: office@max-europe.com

Dealer:

RB TT G Ver.7 EN